



Precision Router Table Stop Instructions #PRS7850

Thank you for purchasing this Kreg Precision Routing Accessory. The Router Table Stop provides an easy and efficient method for making incredibly precise cuts, one after another.

WARNING: This product contains one or more chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands after handling.



*Blade Guard in image removed for clarity.

About the Stop

This stop was specifically designed for use with the Kreg Precision Router Table. It can also be used with our Precision Benchtop Router Table with the addition of select accessories. Call 1.800.447.8638 for more information.

Stop Positioning

Before assembly, determine which side of the blade you will be placing the stop. If you will be placing it on the left side, you will need to put the Stop Arm on the right side of the Stop Base (as shown below). If you will be placing it on the right side, you will need to reverse the stop arm positioning so that you can see how the stop aligns with the measuring tape.


Stop Tension

Depending on whether you want the stop to swing freely or stay wherever you place it, you'll need to adjust the tension of the Stop Arm. To do this, simply tighten or loosen the nyloc nut until your desired tension is met.

Lens Cursor

Because the tape on your Kreg Precision Router Table is not offset, and the zero is precisely centered with your router bit, it is not necessary in most situations to utilize the Precision Lens Cursor included with this stop. However, if you plan on using this stop on another fence with an offset tape, the Precision Lens Cursor will allow you to compensate for the offset and will also magnify the tape for improved clarity.

Assembly Instructions

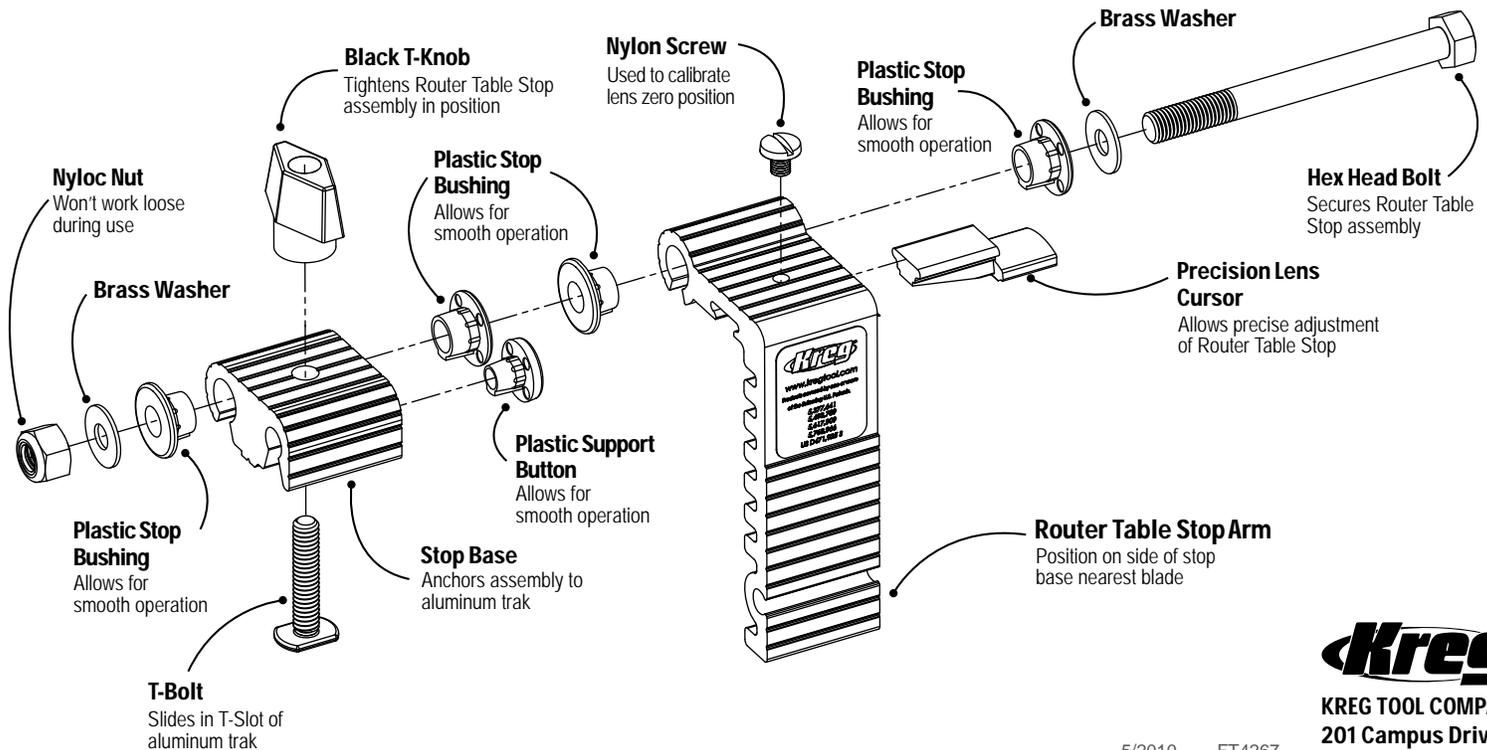

5/2010 FT4267 Rev D



KREG TOOL COMPANY
201 Campus Drive
Huxley, IA 50124

Precision Router Table Stop Parts Identification

Name	Dimensions	Qty	Part#
Router Table Stop Arm		1	FT4263
Precision Lens Cursor		1	FT4063
Nyloc Nut	5/16" - 24	1	FT4061
Brass Washer	5/16"	2	FT4137
Nylon Screw	10-32 x 1/4"	1	FT4064
Black T-Knob		1	DK1313

Name	Dimensions	Qty	Part#
Hex Head Bolt	5/16" - 24 x 3 - 1/4"	1	FT4060
Stop Base		1	FT4262
T-Bolt	1/4" - 20 x 1-1/4"	1	FT4212
Plastic Stop Bushing		4	FT4257
Plastic Support Button		1	FT4258