
Crochet Hook Kit - CT-CROCH-CH INSTRUCTIONS



A.REQUIRED TOOLS AND ACCESSORIES

- 7 mm pen mandrel (MAND-92)
- 9.5(3/8") mm Drill Bit (BPD-38-PRC)
- Barrel Trimmer (PKTRIMKIT)
- 2 pcs Bushings Set (BUSH-CROCH)
- 2 part epoxy glue or CA super glue (cyanoacrylate)
- Wood or acrylic blank, minimum size 3/4" square
- Sanding and finishing supplies

The barrels are made out of turned wood or acrylic blanks.

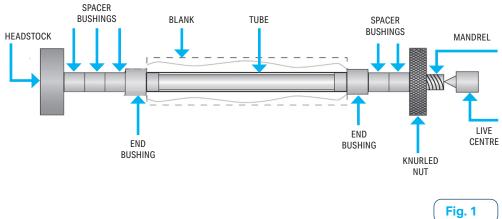

B. PREPARING THE BLANK

- Cut a 3/4" or larger blank, to the length of the brass tubes (add 1/16" for squaring off).
- 2. Drill an 9.5mm (3/8") hole through the centre of the blank.
- 3. Spread glue over the tube.
- 4. Insert the tubes into the blank with a twisting motion to spread the glue evenly inside.
- **5.** Centre the tubes lengthwise inside the blank.
- 6. When the glue is dry, trim the ends of the blank flush to the tube.

C. TURNING THE BLANK

- 1. Place the bushings and blank onto the mandrel according to figure 1.
- 2. Thread on the knurled nut and hand tighten on the mandrel to hold components in place.
- 3. Slide the tailstock to the mandrel shaft and lock in place (do not overtighten or it could damage or bend the mandrel).
- 4. Turn the handle ends down, flush with the bushings using turning chisels, finishing by gradually increasing grades of sandpaper.
- 5. Finish the blank by applying polish or other finish.

LUMINUM OXIDE CROCHET HOOK HOLDER TUBE Size: 9.3x8.8x75mm Tube Size: 9.3x8.8x75mm Tube Size: 9.3x8.8x75mm Size: 9.3x8.

CROCHET HOOK ASSEMBLY

D. ASSEMBLY

- 1. Line up the components according to Figure 2.
- 2. Press the cap and clip assembly to one end of the tube.
- 3. Screw the crochet hook into the crochet hook holder. There are 8 sizes hooks options.
- 4. Slide the crochet hook holder in and out with both ends to assure a secure fit.
- 5. When not in use, reverse the hook assembly to safely store the hook.